


PA6S Portable PA System & Personal Monitor



- 2-Way Speaker System
- 6.5" Neodymium Woofer
- 1.5" Titanium Dome Tweeter
- 170 Watt Amplifier
- 3 Inputs (2-XLR/1/4" Combos, One 1/8")
- Mounts to Any Mic Stand
- Integral Handle
- Built In Compressor/Limiter
- XLR Pass Thru On Channels 1 & 2

Great Features

- The new design of the PA6S includes the convenient mic stand insert on the bottom of the unit. This allows a quick setup on top of a mic stand, with the PA6S angled upward for accurate vocal monitoring.
- The included mic stand adaptor insures a more stable and secure placement on any mic stand.
- Molded-in yoke bracket points. With the optional yoke bracket assembly the PA6S can be mounted to a wall or ceiling, or attached to a mic stand and angled in any direction.
- Microphone boom mount on top of the PA6S eliminates the need for a second mic stand for your microphone. (Requires optional hardware).
- Integrated handle into the top of the enclosure.
- Built in Compressor/Limiter prevents output distortion.
- -20dB pad switches on each XLR input allow high-level signals without distortion.
- 3 band EQ (High, Mid, Low) to adjust the sound to what you want to hear.
- Pass through on each channel acts as a built in splitter to send signals to a mixer snake or another PA6S.
- Two way speaker system: 6.5" neodymium high power woofer and 1.5" high efficiency Neolite tweeter allows for wider frequency response.
- 170 watt Class D amplifier.
- Lighter weight: Innovative speaker and amplifier designs actually allowed us to reduce the weight of the PA6S from its predecessors, while improving the performance.

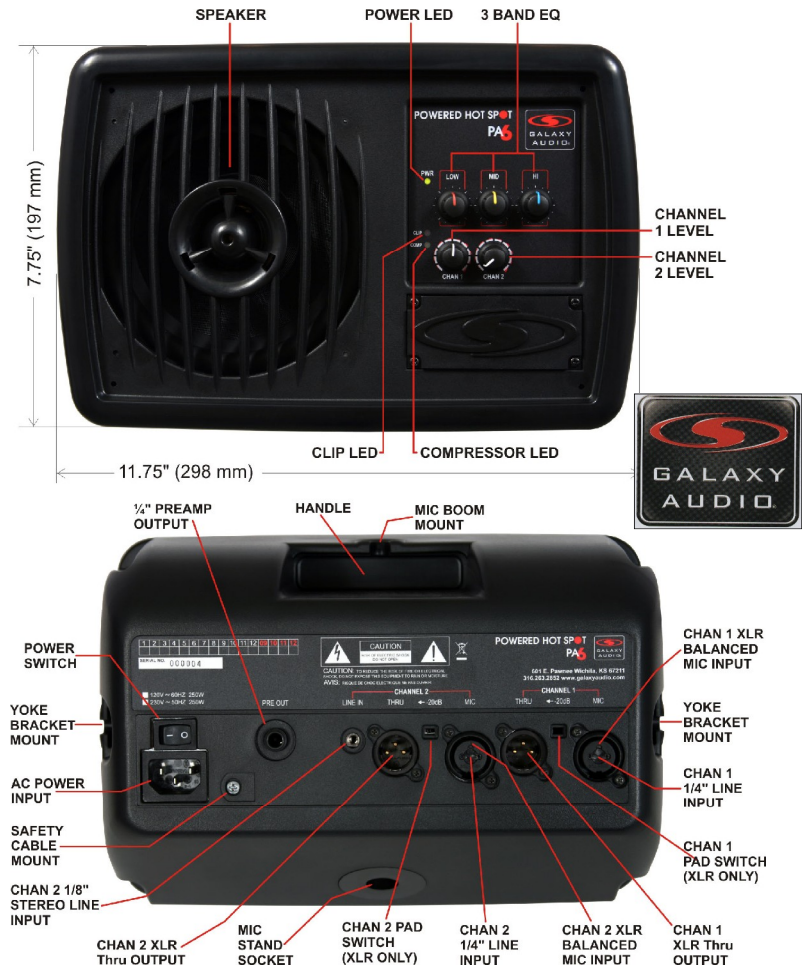

Features & Options

Wedge shaped design allows The PA6S to be placed on the floor or on a keyboard

